

48" X 48" TRAFFIC COVER-VAULT (INSTALLATION DETAIL)

NOTE: PLACE CASTING SO
LADDER BOLTS WILL BE ON
SIDE FACING TRAFFIC.

KEY 1/4" X 1" TCP TO BOTTOM—FOR RETURNING
COVER TO ORIGINAL POSITION.

1/2" MACHINE BOLTS—2 REQ'D FOR LADDER
TO BE INSTALLED
BEFORE CONCRETE IS
PLACED.
NECK TO BE POURED
WITH PAN IN PLACE.
GREASE BOTTOM OF
PAN ON BEARING
SURFACE.


NOTE

COVER TO BE MARKED
"R.E.L.D."

7/8" CORED HOLE FOR
3/4" X 8" LIFTING
EYE BOLT.

C/R TO PLUG HOLES
AFTER INSTALLATION
WITH REMOVABLE
WATERPROOF PLUGS.

FILL PAN WITH SAME MATERIAL AS FINISH
PAVEMENT EXCEPT UNDER M.H. RING WHICH
WILL BE CONCRETE.

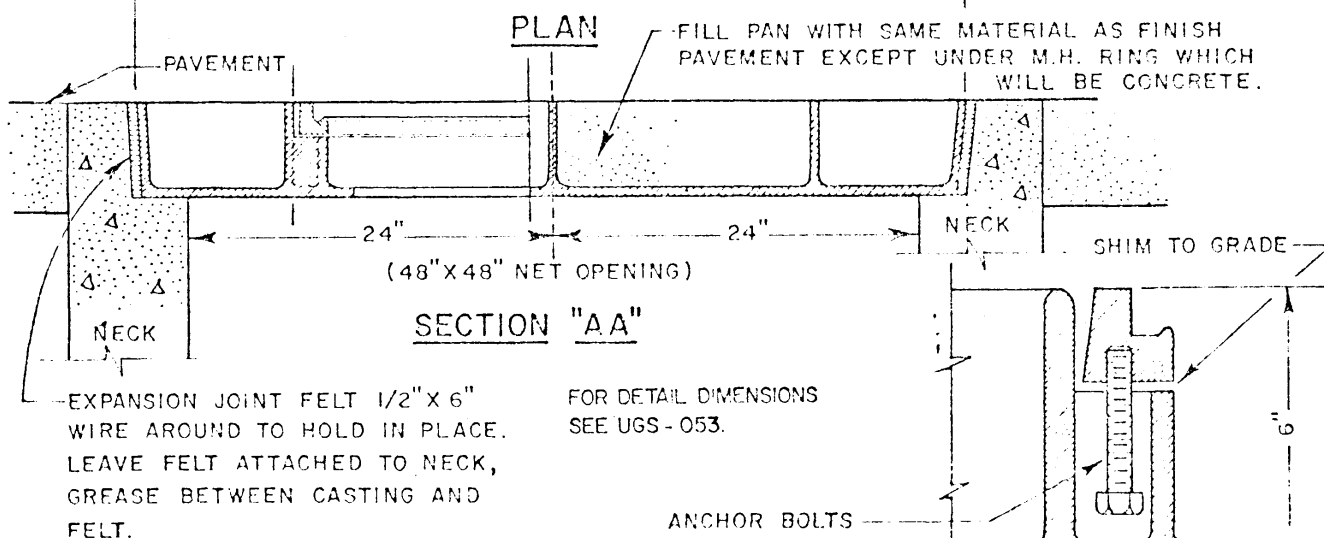

SECTIONS "BB" & "CC"